

# MX series



## Diesel and LPG Fuel Forklift Trucks

**2,000kg / 2,500kg / 3,000kg**

- Electronic Powershift transmission delivers fast load handling
- Proven components ensure excellent reliability and high productivity
- Wide range of optional extras



## Truck Dimensions

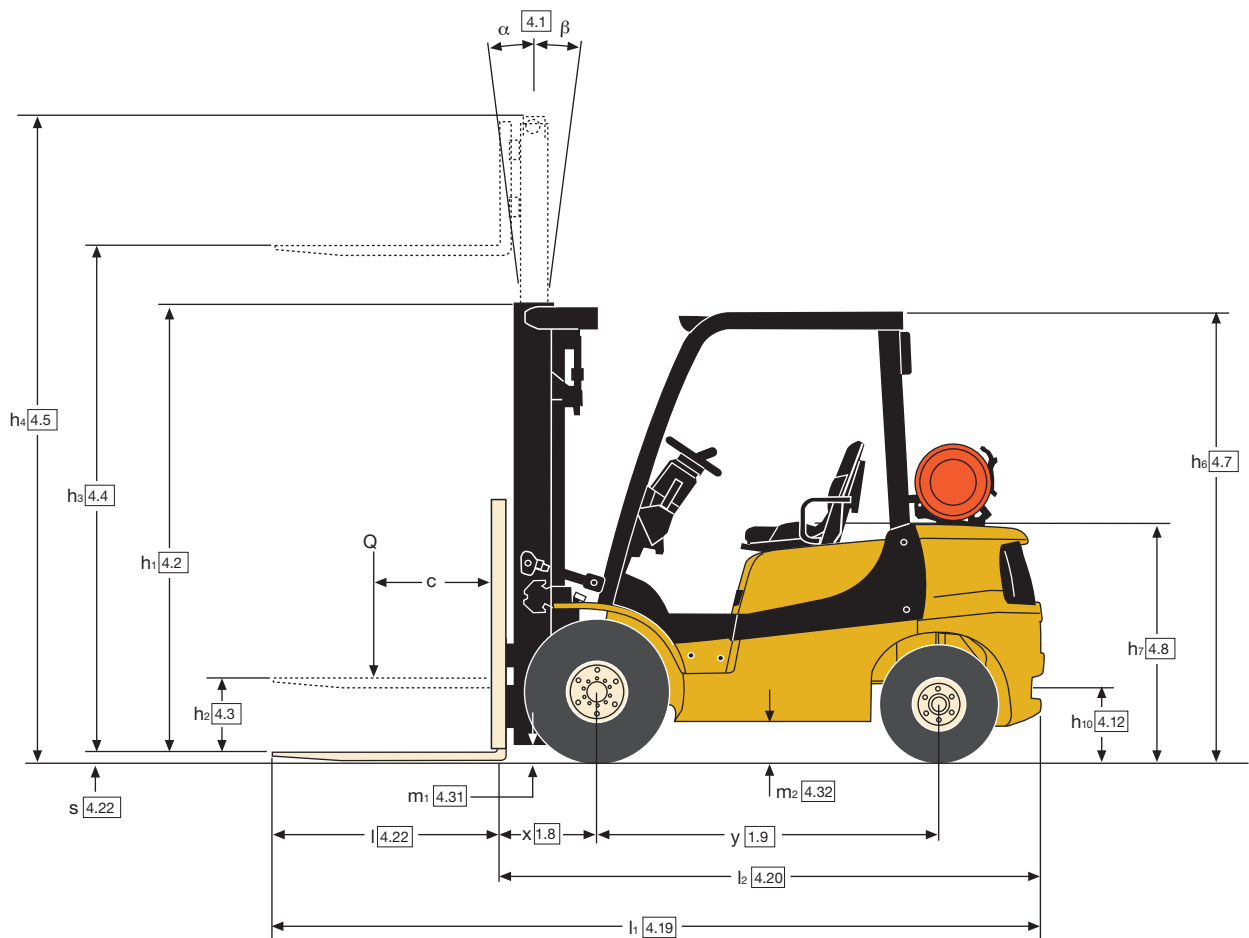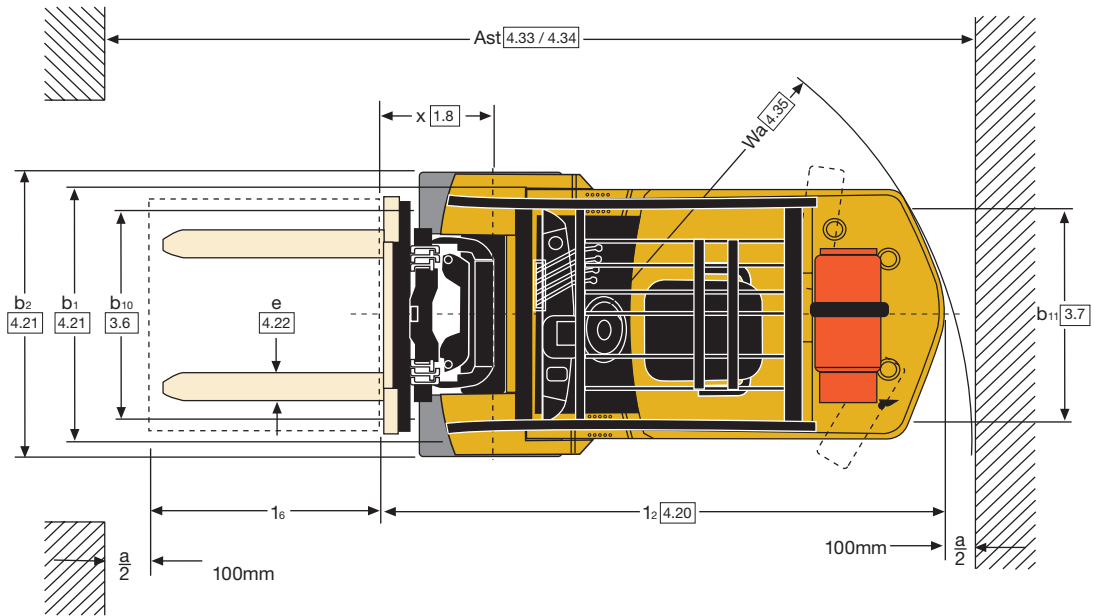

## GDP/GLP 20MX mast details and capacity ratings (kg) - Superelastic tyres

Model						GDP/GLP 20 MX						
Tyre size, front						7.00 x 12-12						
Overall width, front						1140mm						
Mast	h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm) <sup>(1)</sup>	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			ISS & FP		
					F	B	Load centre (kg)			Load centre (kg)		
							500	600	700	500	600	700
2 Stage LFL	2170	140	3290	4515	6	6	2000	1890	1720	1980	1800	2060
	2420	140	3790	5015	6	6	2000	1870	1710	1970	1790	2050
	2770	140	4330	5555	6	6	2000	1860	1700	1960	1780	2040
	3020	140	4830	6055	6	6	1900	1760	1610	1850	1680	1940
3 Stage FFL	1970	1380	4350	5570	6	6	2000	1850	1700	1950	1770	2060
	2120	1530	4800	6020	6	6	1910	1770	1620	1860	1690	1970
	2170	1580	4950	6170	6	6	1880	1740	1590	1820	1660	1940
	2270	1680	5100	6320	6	6	1850	1700	1560	1790	1630	1910
	2420	1830	5550	6770	6	6	1750	1600	1470	1680	1530	1810
	2620	2030	6000	7220	6	6	1640	1490	1360	1570	1420	1700

<sup>(1)</sup>Wide tread required for this rating.

## GDP/GLP 25MX mast details and capacity ratings (kg) - Superelastic tyres

Model						GDP/GLP 25 MX						
Tyre size, front						7.00 x 12-12						
Overall width, front						1140mm						
Mast	h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm) <sup>(1)</sup>	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			ISS & FP		
					F	B	Load centre (kg)			Load centre (kg)		
							500	600	700	500	600	700
2 Stage LFL	2170	140	3290	4515	6	6	2500	2340	2140	2470	2250	2060
	2420	140	3790	5015	6	6	2500	2330	2130	2460	2240	2050
	2770	140	4330	5555	6	6	2500	2320	2120	2440	2220	2040
	3020	140	4830	6055	6	6	2390	2210	2020	2330	2120	1940
3 Stage FFL	1970	1380	4350	5570	6	6	2500	2340	2140	2470	2240	2060
	2120	1530	4800	6020	6	6	2400	2250	2050	2360	2150	1970
	2170	1580	4950	6170	6	6	2370	2210	2020	2330	2120	1940
	2270	1680	5100	6320	6	6	2330	2170	1990	2290	2080	1910
	2420	1830	5550	6770	6	6	2100	2060	1890	2100	1970	1810
	2620	2030	6000	7220	6	6	1770	1770	1770	1780	1780	1700

<sup>(1)</sup>Wide tread required for this rating.

## GDP/GLP 30MX mast details and capacity ratings (kg) - Superelastic tyres

Model						GDP/GLP 30 MX						
Tyre size, front						7.00 x 12-12						
Overall width, front						1140mm						
Mast	h <sub>1</sub> (mm)	h <sub>2+s</sub> (mm) <sup>(1)</sup>	h <sub>3+s</sub> (mm)	h <sub>4</sub> (mm)	Tilt		Forks			ISS & FP		
					F	B	Load centre (kg)			Load centre (kg)		
							500	600	700	500	600	700
2 Stage LFL	2195	150	3105	4335	6	6	3000	2780	3105	2920	2660	2440
	2245	150	3205	4435	6	6	3000	2780	3205	2920	2660	2440
	2445	150	3605	4835	6	6	3000	2770	3605	2910	2650	2430
	2795	150	4105	5335	6	6	3000	2750	4105	2890	2630	2420
3 Stage FFL	3045	150	4605	5835	6	6	2900	2650	4605	2780	2540	2330
	1995	1315	4015	5245	6	6	3000	2760	4015	2890	2630	2420
	2195	1515	4615	5845	6	6	2910	2670	4615	2790	2540	2330
	2245	1615	4765	5995	6	6	2870	2630	4765	2760	2510	2300
	2345	1665	4915	6145	6	6	2840	2600	4915	2720	2480	2270
	2445	1765	5215	6445	6	6	2720	2530	5215	2650	2410	2210
	2695	2015	5815	7045			2120	2120	5815	2140	2140	2070

<sup>(1)</sup>Wide tread required for this rating.

## Engine Specifications

### Diesel

<b>Engine</b>	<b>Yanmar 4TNE92</b>
4 cylinder	Overhead valve
Displacement	2.6 litre
Power	37.4 kW @ 2,350rpm
Torque	150 Nm @ 1,600rpm
Air filtration	Single stage, dry type
IDI fuel injection system	


### Diesel

<b>Engine</b>	<b>Yanmar 4TNE98</b>
4 cylinder	Overhead valve
Displacement	3.3 litre
Power	50.6 kW @ 2,3rpm
Torque	214 Nm @ 1,700rpm
Air filtration	Single stage, dry type
IDI fuel injection system	

### LPG

<b>Engine</b>	<b>PSI</b>
4 cylinder	Overhead valve
Displacement	2.4 litre
Power	44kW @ 2,700rpm
Torque	164Nm @ 2,000rpm
Air filtration	Single stage, dry type
Emission Control	Open loop

## Capacity Graph - 2 stage Standard Carriage

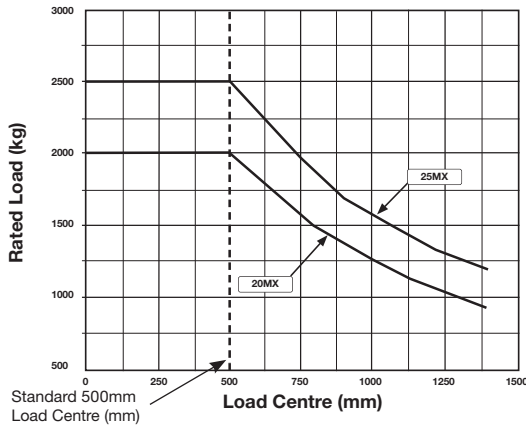

### Truck configuration

2 stage FFL 3830mm MFH mast. 977mm Standard carriage with Load Backrest.

### Basic truck:


LPG with 1 speed basic transmission and Overhead Guard. Solid Pneumatic tyres.

The ratings are computed using fork lengths as follows;

All models	Load centre	Fork length
	500 to 700	Approx. 2 x LC
Over 700 to 1000	1500	
Over 1000	1800	

Load centres of 1000mm and greater require forks with higher ratings to achieve rating shown.

## Capacity Graph - 2 stage ISS

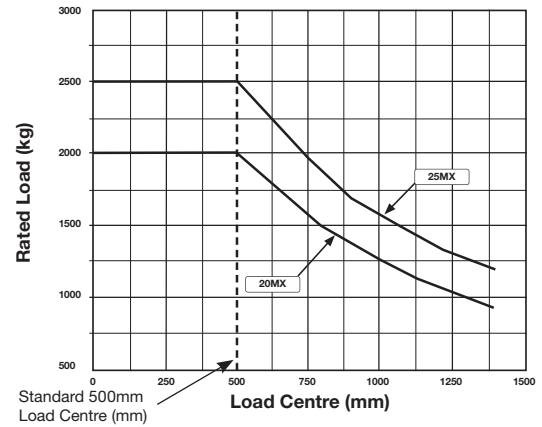

### Truck configuration

2 stage FFL 3830mm MFH mast. 1067mm Integral sideshift carriage with Load Backrest.

### Basic truck:


LPG with 1 speed basic transmission and Overhead Guard. Solid Pneumatic tyres.

The ratings are computed using fork lengths as follows;

All models	Load centre	Fork length
	500 to 700	Approx. 2 x LC
Over 700 to 1000	1500	
Over 1000	1800	

Load centres of 1000mm and greater require forks with higher ratings to achieve rating shown.

## Rated Load vs. Load Centre - 3 stage Standard Carriage

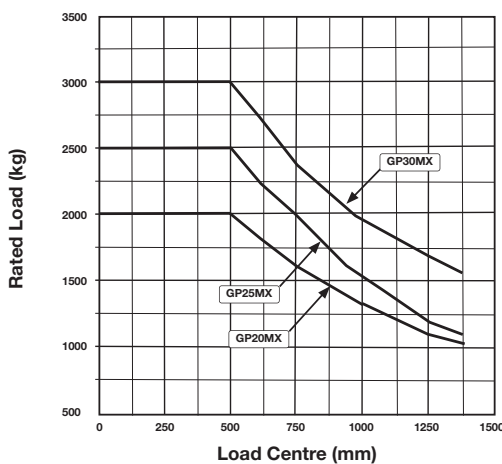

### Truck configuration

3 stage FFL mast at HNHL (4015mm MFH for GP30MX). 1067mm standard carriage with load backrest.


### Basic truck:

LPG with 1 speed basic transmission and Overhead Guard. Solid Pneumatic tyres.

The ratings are computed using fork lengths as follows;

All models	Load centre (mm)	Fork length (mm)
	500 to 775	2 x LC
Over 775 to 1067	1525	
Over 1067	1825	

## Rated Load vs. Load Centre - 3 stage ISS Carriage

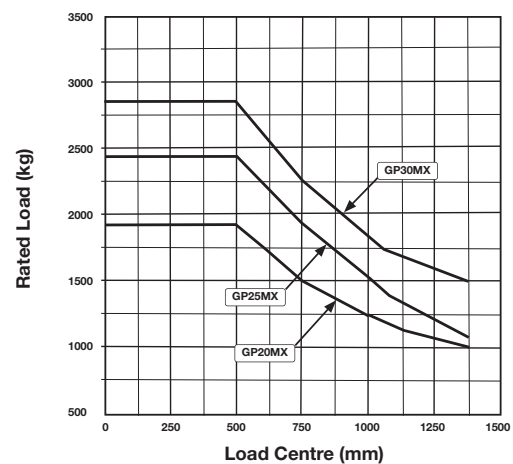

### Truck configuration

3 stage FFL mast at HNHL (4015mm MFH for GP30MX). 1067mm standard carriage with load backrest.

### Basic truck:

LPG with 1 speed basic transmission and Overhead Guard. Solid Pneumatic tyres.

The ratings are computed using fork lengths as follows;

All models	Load centre (mm)	Fork length (mm)
	500 to 775	2 x LC
Over 775 to 1067	1525	
Over 1067	1825	

## MX20, MX25, MX30 - Standard and Optional Features

Standard	Optional
<b>Front End Equipment</b> 2-Stage limited free lift High Vis™ mast with 3035mm maximum fork height Hook-type carriage with 1070mm high load backrest (LBR) 1070mm long forks	<b>Front End Equipment</b> 2-Stage limited free lift High Vis™ masts with up to 4855mm lift height 2-Stage full free lift High Vis™ masts with up to 3390mm lift height 3-Stage full free lift High Vis™ masts with up to 6580mm lift height Integral side shift (ISS) carriage Fork lengths are available from 1070mm to 1520mm
<b>Engine / Drivetrain / Brakes</b> PSI 2.4L LPG engine on GLP20-30MX Yanmar 2.6L, Yanmar 3.3L Diesel engines on GDP20-30MX Automatic transmission with: <ul style="list-style-type: none"> <li>• Mechanical inching</li> <li>• Neutral start function</li> </ul> Lever directional control Self-adjusting drum brakes Super-elastic tyres	<b>Engine / Drivetrain / Brakes</b> Neutral start function Heavy duty clutch Foot Directional Control (FDC) Heavy duty drum brakes (GP/GDP/GLP20-35MX only) Non Marking super-elastic tyre (divided Rim) Premium super-elastic tyre (single piece rim) Pneumatic radial tyre (single piece rim). Note: 2.0-2.5T can take 28 x 9 x 15 tyre
<b>Controls and Instrumentation</b> Combined inch / brake pedal 2-function cowl-mounted hydraulic controls LCD panel with: <ul style="list-style-type: none"> <li>• Hour meter</li> <li>• Fasten seatbelt indicator</li> <li>• Fuel level with low fuel audible alarm (Petrol and Diesel fuel only)</li> <li>• Real time clock</li> </ul> Service Indicators: <ul style="list-style-type: none"> <li>• Service required</li> <li>• Error message</li> <li>• Coolant temperature with high temperature warning buzzer</li> <li>• Alternator with warning buzzer</li> <li>• Transmission oil temperature with warning buzzer</li> <li>• Engine oil pressure with low pressure warning buzzer</li> <li>• Glow lamp (Diesel fuel engine only)</li> <li>• Sedimeter with warning buzzer (Diesel fuel engine only)</li> </ul>	<b>Controls and Instrumentation</b> Separate inch-brake and brake pedals for sure handling on steep inclines 3-function cowl-mounted hydraulic controls with interlock for clamping 4-function cowl-mounted hydraulic controls with or without interlock for clamping Speedometer with speed alarm and warning buzzer Digital load weight display
<b>Seats</b> Adjustable vinyl seat	<b>Seats</b> Full-suspension vinyl or cloth seat with and without AccuTouch mini-levers (Cloth seat available with full cabin options)
<b>Cabin</b> Standard Over Head Guard (OHG) with rain gutter and cup holder 78dB(A) standard noise level for Petrol / LPG engine option 83.5dB(A) standard noise level for Diesel engine option	<b>Cabin</b> High Overhead Guard without Cab – accommodates front, top, rear cab panel options and the PVC doors. High Overhead Guard with Cab with steel doors option. Cabs can be retro-fitted.
<b>Environmental</b> 5in. Cyclone type air cleaner (LPG) 6.5in. Cyclone type air cleaner (Diesel) High air intake Horizontal exhaust Serpentine core radiator	<b>Environmental</b> Dual element air filter for LPG engine option Tandem air filter for Diesel engine option Vertical exhaust 2-way catalytic muffler Spark arrestor muffler Heavy duty square fin radiator Large capacity battery
<b>Other</b> Hydraulic cut-out seat interlock (prevents use of hydraulics when operator is not on seat) Electric horn Rubber floor mat Integral tie downs Operator's manual Operator's seat belt Infinitely adjustable steering column Key starting with anti-restart function Hydrostatic steering with return-to-straight steering knob ISO 3691 / JIS D 6202 compliance 12 months / 2,000 hours manufacturer's warranty	<b>Other</b> 2 rear vision mirrors Rotating flasher beacon Light Kit consisting of 2 Halogen front head lights 2 front turn indicators plus rear combination (turn indicators, reversing and brake) lights and reverse alarm Additional front work light Rear work light (switches or reverse operated) Swing-out LPG cylinder bracket

## VDI 2198 - General Specifications 20MX, 25MX, 30MX - Diesel, LPG and Dual Fuel

			Yale	Yale	Yale	Yale	
<b>Distinguishing mark</b>	1.1	Manufacturer (abbreviation)		Yale	Yale	Yale	
	1.2	Manufacturer's type designation		<b>GP 20MX</b>	<b>GP 25MX</b>	<b>GP 25MX</b>	<b>GP 30MX</b>
		Engine		Yanmar 2.6L	Yanmar 2.6L	Yanmar 3.3L	Yanmar 2.6L
		Transmission		Standard Electronic 1-speed	Standard Electronic 1-speed	Standard Electronic 1-speed	Standard Electronic 1-speed
		Brake Type		Drum brakes	Drum Brakes	Drum Brakes	Drum Brakes
	1.3	Drive: electric (battery or mains), diesel, petrol, LPG		Diesel	Diesel	Diesel	Diesel
		Operator type: hand, pedestrian, standing, seated, order-picker		Seat	Seat	Seat	Seat
	1.5	Rated capacity/rated load	Q (t)	2.0	2.5	2.5	3.0
	Load centre distance	c (mm)	500	500	500	500	
1.8	Load distance, centre of drive axle to fork	x (mm)	471	471	471	478	
	Wheelbase	y (mm)	1623	1623	1623	1700	
<b>Weights</b>	2.1	Service weight	kg	3710	4040	4073	4650
		Axle loading, laden front / rear	kg	4954 / 757	5674 / 866	5869 / 703	6556 / 1077
	2.3	Axle loading, unladen front / rear	kg	1747 / 1963	1669 / 2371	1874 / 2200	1872 / 2778
<b>Tyres / chassis</b>		Tyres: L=pneumatic, V=solid, SE=Pneumatic Shape Solid		SE	SE	SE	SE
	3.1	Tyres: P = pneumatic, V = cushion, SE = superelastic		SE	SE	SE	SE
		Tyre size, front		7.00 x 12-12	7.00 x 12-12	7.00 x 12-12	28 x 9 - 15
	3.3	Tyre size, rear		6.00 x 9	6.00 x 9	6.00 x 9	6.50 x 10
		Wheels, number front / rear (x = driven wheels)		2 x / 2	2 x / 2	2 x / 2	2 x / 2
	3.6	Tread, front	b <sub>10</sub> (mm)	970	970	970	970
	Tread, rear	b <sub>11</sub> (mm)	993	993	993	993	
<b>Dimensions</b>	4.1	Tilt of mast / fork carriage forward / backward	α / β (°)	6 / 6	6 / 6	6 / 6	6 / 6
		Height, mast lowered	h <sub>1</sub> (mm)	1970	1970	1970	1995
	4.3	Free lift ▲	h <sub>2</sub> (mm)	1554	1554	1554	1554
		Lift ▲	h <sub>3</sub> (mm)	4350	4350	4350	4015
	4.5	Height, mast extended +	h <sub>4</sub> (mm)	4820	4820	4820	4820
		Height of overhead guard (cabin) ○	h <sub>6</sub> (mm)	2221	2221	2221	2221
	4.8	Seat height relating to SIP / stand height ✕	h <sub>7</sub> (mm)	1129	1129	1129	1149
		Coupling height	h <sub>10</sub> (mm)	349	349	349	369
	4.19	Overall length	l <sub>1</sub> (mm)	3528	3589	3589	3696
		Length to face of forks	l <sub>2</sub> (mm)	2528	2589	2589	2696
	4.21	Overall width	b <sub>1</sub> / b <sub>2</sub> (mm)	1140	1140	1140	1206
		Fork dimensions ISO 2331	s/e/l (mm)	40 x 100 x 1000	40 x 100 x 1000	40 x 100 x 1000	50 x 125 x 1000
	4.23	Fork carriage ISO 2328, class / type A, B		IIA	IIA	IIA	IIIA
		Fork carriage width ●	b <sub>3</sub> (mm)	1067	1067	1067	1067
	4.31	Ground clearance, laden, below mast	m <sub>1</sub> (mm)	80	80	80	100
		Ground clearance, centre of wheelbase	m <sub>2</sub> (mm)	190	190	190	210
	4.34.1	Aisle width for pallets 1000 x 1200 crossways	A <sub>st</sub> (mm)	3649	3707	3707	3802
		Aisle width for pallets 800 x 1200 crossways	A <sub>st</sub> (mm)	3849	3907	3907	4002
4.35	Turning radius	W <sub>a</sub> (mm)	2178	2236	2236	2324	
	Internal turning radius	b <sub>13</sub> (mm)	629	629	629	618	
4.43	Step height	(mm)	415	415	415	435	
<b>Performance data</b>		Travel speed, laden / unladen	km/h	17.3 / 17.5	17.3 / 17.5	17.3 / 17.5	18.7 / 18.9
	5.2	Lift speed, laden / unladen	m/s	0.65 / 0.68	0.65 / 0.68	0.65 / 0.68	0.57 / 0.60
		Lowering speed, laden / unladen	m/s	0.58 / 0.50	0.58 / 0.50	0.58 / 0.50	0.58 / 0.50
	5.5	Drawbar pull, laden / unladen	kN	15.0 / 12.2	14.8 / 12.2	23.0 / 12.2	13.4 / 13.8
		Gradeability, laden / unladen *	%	18.1 / 34.6	15.3 / 30.7	26.1 / 30.7	12.3 / 30.5
	5.9	Acceleration time, laden/unladen **	s	4.6 / 4.2	4.9 / 4.3	4.2 / 3.9	5.3 / 4.5
	Service brake		Hydraulic	Hydraulic	Hydraulic	Hydraulic	
<b>Combustion engine</b>	7.1	Engine manufacturer/type		Yanmar 2.6L	Yanmar 2.6L	Yanmar 3.3L	Yanmar 2.6L
		Engine power according to ISO 1585	kW	33.9	33.9	43.0	33.9
	7.3	Rated speed	rpm	2600	2600	2600	2600
		Number of cylinders/displacements	cm <sup>3</sup>	4 / 2659	4 / 2659	4 / 3319	4 / 2659
	7.5	Fuel consumption according to VDI cycle	l/h or kg/h	2.7	3.1	3.3	3.5
	Type of drive unit		Automatic	Automatic	Automatic	Automatic	
<b>Addition data</b>	10.1	Operating pressure for attachments	bar	0-155	0-155	0-155	0-155
		Oil volume for attachments	l/min	60	60	60	60
	10.3	Hydraulic oil tank, capacity	litres	42	42	42	42
		Fuel tank, capacity	litres	69	69	69	69
	10.7	Sound pressure level at the driver's seat ★	dB(A)	79	79	79	79
		Sound power level during the workcycle		102	102	102	102
	10.8	Towing coupling, type DIN		Pin	Pin	Pin	Pin

▲ Top of forks.

+ W/o load backrest.

○ h<sub>6</sub> subject to +/- 5 mm tolerance.

✕ Full suspension seat in depressed position.

● add 32mm with load backrest.

\* at 1.6km/h

\*\* at 4.8km/h

★ Measured according to the test cycles and based on the weighting values contained in EN12053.

Yale	Yale	Yale	Yale		Manufacturer (abbreviation)	1.1	Distinguishing mark
<b>GP 30MX</b>	<b>GP 20MX</b>	<b>GP 25MX</b>	<b>GP 30MX</b>		Manufacturer's type designation	1.2	
Yanmar 3.3L	PSI 2.4L	PSI 2.4L	PSI 2.4L		Engine		
Standard Electronic 1-speed	Standard Electronic 1-speed	Standard Electronic 1-speed	Standard Electronic 1-speed		Transmission		
Drum Brakes	Drum Brakes	Drum Brakes	Drum Brakes		Brake Type		
Diesel	LPG	LPG	LPG		Drive: electric (battery or mains), diesel, petrol, LPG	1.3	
Seat	Seat	Seat	Seat		Operator type: hand, pedestrian, standing, seated, order-picker	1.4	
3.0	2.0	2.5	3.0	Q (t)	Rated capacity/rated load	1.5	
500	500	500	500	c (mm)	Load centre distance	1.6	
478	471	471	478	x (mm)	Load distance, centre of drive axle to fork	1.8	
1700	1623	1623	1700	y (mm)	Wheelbase	1.9	
4712	3710	4040	4650	kg	Service weight	2.1	Weights
6819 / 893	4954 / 757	5674 / 866	6556 / 1077	kg	Axle loading, laden front / rear	2.2	
2093 / 2619	1747 / 1963	1669 / 2371	1872 / 2778	kg	Axle loading, unladen front / rear	2.3	
SE	SE	SE	SE		Tyres: L=pneumatic, V=solid, SE=Pneumatic Shape Solid	3.1	Tyres / chassis
SE	SE	SE	SE		Tyres: P = pneumatic, V = cushion, SE = superelastic	3.1	
28 x 9 - 15	7.00 x 12-12	7.00 x 12-12	28 x 9 - 15		Tyre size, front	3.2	
6.50 x 10	6.00 x 9	6.00 x 9	6.50 x 10		Tyre size, rear	3.3	
2 x /2	2 x /2	2 x /2	2 x /2		Wheels, number front / rear (x = driven wheels)	3.5	
970	970	970	970	b10 (mm)	Tread, front	3.6	
993	993	993	993	b11 (mm)	Tread, rear	3.7	
6 / 6	6 / 6	6 / 6	6 / 6	$\alpha / \beta$ (°)	Tilt of mast / fork carriage forward / backward	4.1	
1995	1970	1970	1995	h1 (mm)	Height, mast lowered	4.2	
1554	1554	1554	1554	h2 (mm)	Free lift ▲	4.3	
4015	4350	4350	4015	h3 (mm)	Lift ▲	4.4	
4820	4820	4820	4820	h4 (mm)	Height, mast extended +	4.5	
2221	2221	2221	2221	h6 (mm)	Height of overhead guard (cabin) ○	4.7	
1149	1129	1129	1149	h7 (mm)	Seat height relating to SIP / stand height ✕	4.8	
369	349	349	369	h10 (mm)	Coupling height	4.12	
435	3528	3589	3696	l1 (mm)	Overall length	4.19	
3696	2528	2589	2696	l2 (mm)	Length to face of forks	4.20	
2696	1140	1140	1206	b1 / b2 (mm)	Overall width	4.21	
1206	40 x 100 x 1000	40 x 100 x 1000	50 x 125 x 1000	s/e/l (mm)	Fork dimensions ISO 2331	4.22	
50 x 125 x 1000	IIA	IIA	IIIA		Fork carriage ISO 2328, class / type A, B	4.23	
IIIA	1067	1067	1067	b3 (mm)	Fork carriage width ●	4.24	
1067	80	80	100	m1 (mm)	Ground clearance, laden, below mast	4.31	
100	190	190	210	m2 (mm)	Ground clearance, centre of wheelbase	4.32	
210	3649	3707	3802	Ast (mm)	Aisle width for pallets 1000 x 1200 crossways	4.34.1	
3802	3849	3907	4002	Ast (mm)	Aisle width for pallets 800 x 1200 crossways	4.34.2	
4002	2178	2236	2324	Wa (mm)	Turning radius	4.35	
2324	629	629	618	b13 (mm)	Internal turning radius	4.36	
435	415	415	435	(mm)	Step height	4.43	
18.7 / 18.9	18.4 / 18.6	18.4 / 18.6	19.8 / 20.0	km/h	Travel speed, laden / unladen	5.1	Performance data
0.57 / 0.60	0.59 / 0.62	0.59 / 0.62	0.54 / 0.57	m/s	Lift speed, laden / unladen	5.2	
0.58 / 0.50	0.58 / 0.50	0.58 / 0.50	0.58 / 0.50	m/s	Lowering speed, laden / unladen	5.3	
20.9 / 13.8	18.6 / 12.2	18.4 / 12.2	16.8 / 13.8	kN	Drawbar pull, laden / unladen	5.5	
20.9 / 30.5	23.9 / 34.6	20.2 / 30.7	16.2 / 30.5	%	Gradeability, laden / unladen *	5.7	
4.4 / 3.9	4.0 / 3.9	4.3 / 3.9	5.4 / 4.1	s	Acceleration time, laden/unladen **	5.9	
Hydraulic	Hydraulic	Hydraulic	Hydraulic		Service brake	5.10	
Yanmar 3.3L	PSI 2.4L	PSI 2.4L	PSI 2.4L		Engine manufacturer/type	7.1	Combustion engine
43.0	44.0	44.0	44.0	kW	Engine power according to ISO 1585	7.2	
2600	2700	2700	2700	rpm	Rated speed	7.3	
4 / 3319	4 / 2351	4 / 2351	4 / 2351	cm <sup>3</sup>	Number of cylinders/displacements	7.4	
3.8	2.5	2.8	3.1	l/h or kg/h	Fuel consumption according to VDI cycle	7.5	
Automatic	Automatic	Automatic	Automatic		Type of drive unit	8.1	
0-155	0-155	0-155	0-155	bar	Operating pressure for attachments	10.1	Addition data
60	60	60	60	l/min	Oil volume for attachments	10.2	
42	42	42	42	litres	Hydraulic oil tank, capacity	10.3	
69	-	-	-	litres	Fuel tank, capacity	10.4	
79	79	79	79	dB(A)	Sound pressure level at the driver's seat ★	10.7	
102	103	103	103		Sound power level during the workcycle	10.7.1	
Pin	Pin	Pin	Pin		Towing coupling, type DIN	10.8	

# MX series

Models:

GDP/GLP/GP/GTP 20MX, 25MX, 30MX, 35MX



## HYSTER-YALE UK LIMITED

trading as **Yale Europe Materials Handling**  
Centennial House,  
Frimley Business Park,  
Frimley, Surrey GU16 7SG, United Kingdom.


Tel: +44 (0) 1276 538500 Fax: +44 (0) 1276 538559


[www.yale-forklifts.eu](http://www.yale-forklifts.eu)



Publication part no. 220990482 Rev.00 Printed in The Netherlands (0316HG) EN.

**Safety.** This truck conforms to the current EU requirements. Specification is subject to change without notice.

Yale, VERACITOR and  are registered trademarks. "PEOPLE, PRODUCTS, PRODUCTIVITY", PREMIER, Hi-Vis, and CSS are trademarks in the United States and certain other jurisdictions. MATERIALS HANDLING CENTRAL and MATERIAL HANDLING CENTRAL are Service Marks in the United States and certain other jurisdictions.

 is a Registered Copyright. © Yale Europe Materials Handling 2016. All rights reserved. Truck shown with optional equipment.

Country of Registration: England and Wales. Company Registration Number: 02636775